



AWA Exclusive Edition Always Alert Safe

The smart safe that sends alerts to the smartphone in case of any attack attempts.

THEFT PROTECTION

- The AWA safe uses Wi-Fi network to send alerts to your smartphone about external threats (**burglar attempts, fire, floods, safe opening under coercion, connection loss...**)
- This is a **high security** safe, with a 10 mm thick reinforced front with a 3 mm anti-drill plate; perimeter lock with anti-saw bolts and anti-lever system.

HACK PROTECTION

- The safe stores and **encrypts the opening codes internally; codes are not shared in the cloud.**
- Safe **opening is done face-to-face via BLE.**

EASY TO USE

- Open the safe by entering the code on the safe's keypad, or using a smartphone with a user-friendly and intuitive app.
- **The app allows** the administrator of the safe to:
 - **Manage users and permissions:** up to 9 users can be authorised, with the option to allocate different opening ranges to each one (by time slots, days of the week...)
 - **Receive alerts** about burglar attempts.
 - **Access the safe's log** (record of openings and closings, alerts...)
 - **Manage delayed opening.**
 - **Remote management.**
 - **Establish a coercion code.**




Wi-Fi network is used to send alerts to your smartphone in case of external threats



BLE (Bluetooth Low Energy) is used to open and manage the safe.



AWS Cloud Server and source code based on 62443 regulation

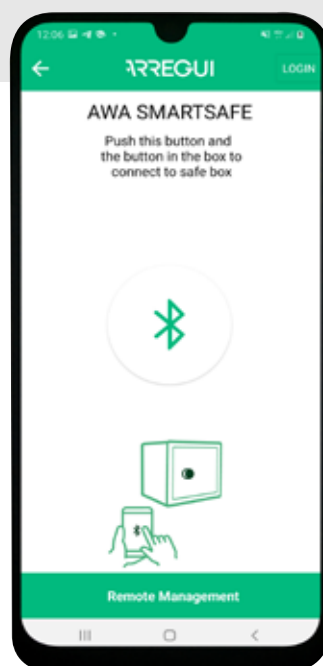

Compatible with



Desktop safes



FEATURES




- Thickness (front / casing): 10+3 mm / 5 mm
- Anti-drill protection on front and frame.
- Anti-saw swivel bolts
- Bolts housing (Anti-lever system)
- Internal light
- Rechargeable battery via micro USB port (battery life 2 months approx.)
- Includes fixing screws
- Fixing holes: 4 at the base and 2 at the rear, 19 mm ø

Ref. 210740T



TYPE OF LOCK

- Capacitive knob (the safe hibernates and wakes up when touched)
- Opening: via smartphone BLE or keypad.
- Emergency key with anti-drill shield
- Opening codes: one administrator code plus 9 for other users
- Number of combinations: 10 millions (4-7 digits)
- Opening lock after 5 incorrect attempts.
- Programmable opening delay, from 1 to 99 min.
- Power supply: USB cable (3 m long)

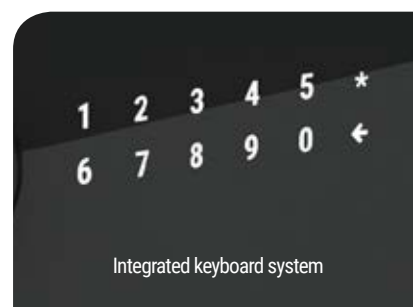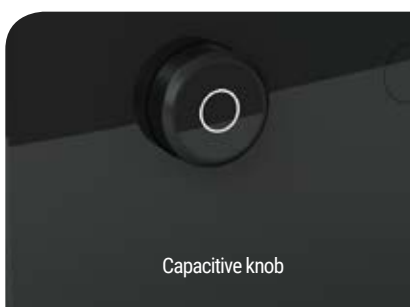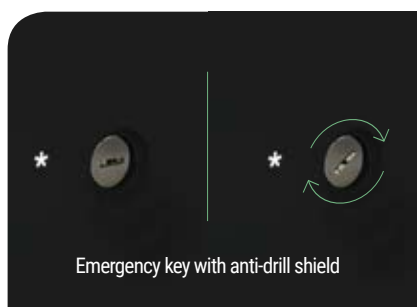

Ref.	Exterior measurements (H x W x D) mm	Interior measurements (H x W x D) mm	Kg	L	Shelf	Bolts No.	Bolts position	EAN13 code	Pack. measurement (H x W x D) mm
210740T	270x385x300	260x375x224	35 kg.	22 L.	1	6 / ø22 mm		8425181 * * 738108	370x435x340