PLUS C

A safe box, S2 **approved according to UNE EN14450,** with excellent physical and electronic security features. Ideal for businesses and homes requiring extra security.
ADJUSTABLE DEPTH that adapts to different wall thicknesses.

EN 14450 S2

FRONTAL THICKNESS 10+3 mm anti-drilling steel

150/220mm
200/300mm

FEATURES
- Thickness (front / casing): 10+3 mm / 2 mm
- Laser cut.
- 3 mm thick drill protection.
- Anti-saw swivel bolts
- Bolts housing (Anti-lever system)
- Adjustable depth

TYPE OF LOCK
- Double-bitted lock **Certified EN1300 CLASS A**

EXTRA
- Adjustable depth, 5 positions each 25 mm. (200/225/250/275/300 mm).

PLUS C
Ref. 181340

! Being a **CERTIFIED LOCK,** the duplicate of keys can only be done by a Technical Assistance Service that has been authorised by ARREGUI. Proving the ownership of the safe and presenting an original key will be necessary.

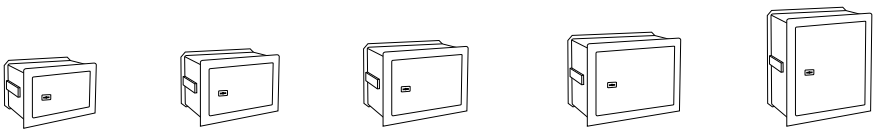

181310 | 181320 | 181340 | 181350 | 181380

Adjustable depth, 5 positions each 25 mm.

Certified lock EN1300 Class A

Rotary locking bolts avert any intent at cutting from the outside.

Ref.	Exterior measurements (H x W x D) mm	Interior measurements (H x W x D) mm	Kg	L	Shelf	Bolts No.	Bolts position	EAN13 code 8425181 *	Pack. measurement (H x W x D) mm
181310	210x320x150/220	170x280x92/162	15 kg.	4-8 L.	-	2/ø22 mm		* 733554	225x340x200
181320	260x360x150/220	220x320x92/162	18 kg.	6-11 L.	1	2/ø22 mm		* 733561	275x380x200
181340	270x385x200/300	230x345x142/242	22 kg.	11-19 L.	1	6/ø22 mm		* 733516	285x405x250
181350	320x420x200/300	280x380x142/242	26 Kg.	15-26 L.	1	7 / ø22 mm		* 733523	335x440x250
181380	520x385x200/300	480x345x142/242	36 kg.	24-40 L.	1	7 / ø22 mm		* 733547	535x405x250